

Pipe mounted return flap valve

Model: **BKZ-DR**

Material: **PEHD**

Usage



- Closing and opening the flow on the emergency channel with circular cross-section
- To be installed at the outlet eg. of treated wastewater to the tank as a component which prevents the backflow
- One-way tightness



Type	Dimensions			
	DN	L	H	B
BKZ-DR 160	160	350	250	210
BKZ-DR 200	200	350	290	250
BKZ-DR 250	250	350	340	300
BKZ-DR 300	300	350	400	370
BKZ-DR 400	400	350	530	520
BKZ-DR 500	500	350	640	620
BKZ-DR 600	600	400	740	720
BKZ-DR 700	700	400	920	840
BKZ-DR 800	800	450	1020	940
BKZ-DR 900	900	450	1120	1040
BKZ-DR 1000	1000	450	1220	1140

Additional information:

1. There are multiple solutions which can be applied while attaching the valve at the outlet pipes shall - fitting according the client's needs.
2. Valve's angle of inclination depends on the client's demands on the pressure value that the valve will be applied for. It is established individually from 30 to 90 degrees

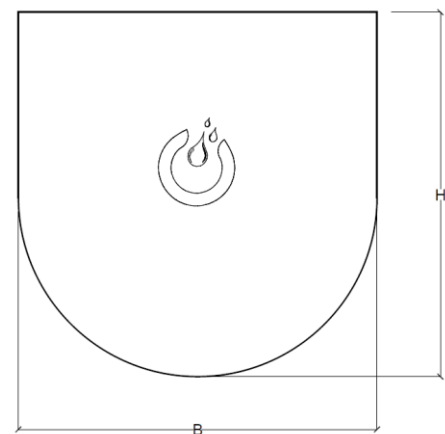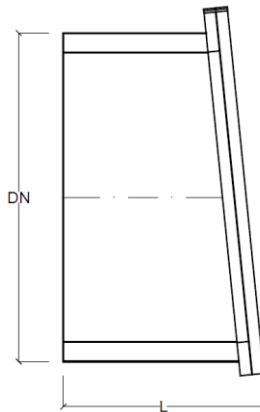

Unusual solutions are always possible yet after the prior consult with the producer!